


NovoTouch

LK8630i

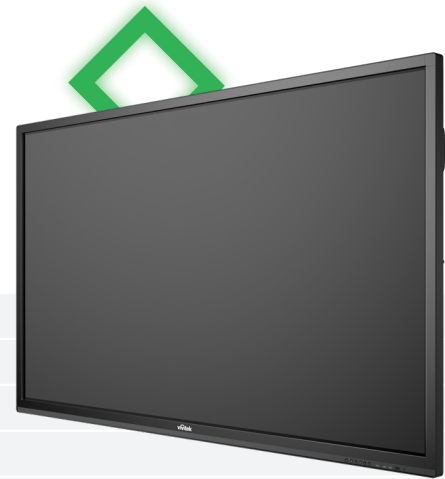

Model Name	NovoTouch LK8630i
Display Technology	Backlit LED (IPS Panel)
Panel Size; Aspect Ratio	86", 16:9
Brightness	330cd/m2
Contrast Ratio (Typical)	1,200:1
Native Resolution	4K Ultra-HD (3840 x 2160)
Viewing Angle (Horiz/Vert)	178°/178°
Refresh Rate (Hz)	60Hz
Display Color (Bit)	1.06 billion (10-bit)
Orientation	Landscape
Touch Technology	Infrared Touch
Touch Points	10 Writing, 20 Touch
Surface Protection	4mm Thick Toughened Glass (Level 7H on Mohs Scale of Mineral Hardness)
Minimum Touch Object	Single-Touch $\geq \Phi 6\text{mm}$ and Multi-Touch $\geq \Phi 8\text{mm}$
Touch Tools	Finger, Stylus, Glove, Opaque Objects
Gestures Supported	Yes
System Version	Android™ v6.0
CPU	RK3399, Dual-Core ARM® Cortex® A72 and Quad Core ARM® Cortex® A53
GPU	Mali™ T860
RAM	4GB DDR3
Internal Storage	16GB
OS Compatibility	Windows® (Windows 7 and above: Driver Free), Mac® (10.10 and above), Android™ (2.2/2.3/4.0/4.1/4.2 (Kernel v3.5 and above - Driver Free), Chrome (v39 and above), Linux (Kernel v3.5 and above)
I/O Ports	HDMI v2 (x1), HDMI v1.4 (x2), DisplayPort (x1), VGA-In (x1), Audio-In (3.5mm) (x1), AV-In (x1), HDMI-Out (1080P) (x1), Audio-Out (3.5mm) (x1), Coaxial-Out (RCA) (x1), LAN (RJ45) (x1), RS232 (x1), USB Type A 2.0 (x4), USB Type A 3.0 (x2), USB Type B (x2)
Internal Speakers	12W (x2) (Stereo)
Power	AC 100-240V, 50/60Hz. Consumption: 500W, <0.5W (Standby)
Panel Dimensions	1,988 x 1,178 x 99.6 mm
Panel Weight (Net)	107 kg
What's included	Touch Screen Panel, NovoConnect Solution Module VKA05, Wall Mount WIB9060A, Documentation Kit, AC Power Cord, VGA Cable, USB Cable, Audio Cable, Stylus (x3), Remote Control with Batteries.
Options	NovoConnect Solution LauncherPlus QL300EU, NovoTouch Plug-In Windows OPS Module VKW21
Model UPC Code	813097023049
Warranty	3 years RTB