


# NovoTouch

## LK9810i

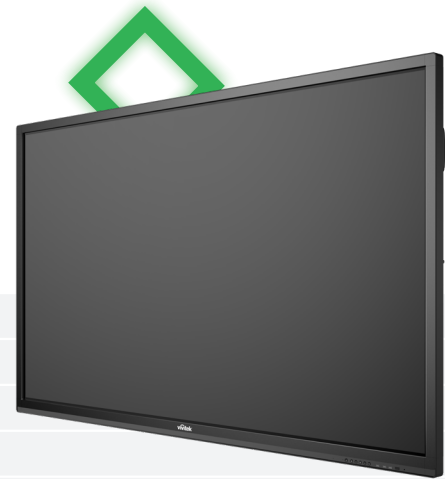

<b>Model Name</b>	NovoTouch LK9810i
<b>Display Technology</b>	Backlit LED (IPS Panel)
<b>Panel Size; Aspect Ratio</b>	98", 16:9
<b>Brightness</b>	440cd/m2
<b>Contrast Ratio (Typical)</b>	1,300:1
<b>Native Resolution</b>	4K Ultra-HD (3840 x 2160)
<b>Viewing Angle (Horiz/Vert)</b>	178°/178°
<b>Refresh Rate (Hz)</b>	120Hz
<b>Display Color (Bit)</b>	1.06 billion (10-bit)
<b>Orientation</b>	Landscape
<b>Touch Technology</b>	Infrared Touch
<b>Touch Points</b>	5 Writing, 10 Touch
<b>Surface Protection</b>	4mm Thick Toughened Glass (Level 7H on Mohs Scale of Mineral Hardness)
<b>Minimum Touch Object</b>	Single-Touch $\geq \Phi 6\text{mm}$ and Multi-Touch $\geq \Phi 8\text{mm}$
<b>Touch Tools</b>	Finger, Stylus, Glove, Opaque Objects
<b>Gestures Supported</b>	Yes
<b>System Version</b>	Android™ v4.2.1
<b>CPU</b>	ARM® Cortex® A9 Dual Core CPU
<b>GPU</b>	Quad Core GPU
<b>RAM</b>	1.5G RAM
<b>Internal Storage</b>	8GB
<b>OS Compatibility</b>	Windows® (Windows 7 and above: Driver Free), Mac® (10.10 and above), Android™ (2.2/2.3/4.0/4.1/4.2 (Kernel v3.5 and above - Driver Free), Chrome (v39 and above), Linux (Kernel v3.5 and above)
<b>I/O Ports</b>	HDMI v1.4 (x1), HDMI v1.3 (x3), AV-In (x1), VGA-In (x3), Audio-In (x3), VGA-Out (x1), Audio-Out (3.5mm (x1)), Coaxial-Out (RCA) (x1), LAN (RJ45) (x1), RS232 (x1), USB Type A 2.0 (x4), USB 3.0 (x1), USB Type B (x2)
<b>Internal Speakers</b>	10W (x2) (Stereo)
<b>Power</b>	AC 100-240V, 50/60Hz. Consumption: 650W, <0.5W (Standby)
<b>Panel Dimensions</b>	2,257 x 1,335 x 121 mm
<b>Panel Weight (Net)</b>	150 kg
<b>What's included</b>	Touch Screen Panel, NovoEnterprise NE3000EU, Wall Mount WIB9060A, Documentation Kit, AC Power Cord, VGA Cable, USB Cable, Audio Cable, Stylus (x3), Remote Control with Batteries.
<b>Options</b>	NovoConnect Solution LauncherPlus QL300EU
<b>Model UPC Code</b>	813097023032
<b>Warranty</b>	3 years RTB