

Wireless Collaboration.

Connect. Work. Share.



Transform your conference room into a true collaborative space.



NovoConnect solution allows users to wirelessly connect to the big screen from the laptop, tablet, or smartphone of their choice. Up to four users can share screens simultaneously. Innovative annotation tools make it easy for everyone to join in the conversation. Snapshot and wireless file sharing functionalities help keep everyone in the loop.

Connect into one simple idea



CONNECT

Connect and mirror any device onto the main screen with easy guest access thanks to LauncherPlus.



WORK

Work instantly with all participants – share files, share ideas and collaborate.



SHARE

Share up to 4 screens at once, while 64 users can be connected to share and annotate.

NovoConnect Solution Features Summary:

Simple & Easy to Connect



Cable-free presenting eliminates the hassle so you can get going in seconds.



Cross-platform screen mirroring lets everyone share from any device.



Quickly connect mobile devices using QR codes and the NovoPresenter app.



Optional USB LauncherPlus for direct connectivity from any laptop with zero impact on your network.

Discussion & Collaboration



Enhance your meeting by sharing up to 4 screens simultaneously, with up to 64 participants connected and ready to switch instantly.



Comment and collaborate in real time with digital annotation and highlighting.



Wirelessly share files, meeting minutes and snapshots with all participants.



Moderator function keeps you in control of the agenda.

Productivity & Privacy



Start your meeting and customize the home screen with your logo, agenda or connection instructions.



With AES encryption and dual network management, security comes first.



Privacy and security are ensured thanks to PIN-protected guest access.



Dual-band WiFi and 2T2R connectivity ensure a high standard of quality and performance.

NovoConnect offers flexibility and easy implementation within the existing infrastructure of any meeting room, eliminating the need to purchase additional equipment. Employees and guests can easily share content, leading to effective and productive meetings and energized collaboration. With its Bring Your Own Device concept, the new range of NovoTouch interactive screens complete the range to provide users with a complete wireless connectivity to a variety of devices.

NovoTouch


NovoTouch is an all-in-one premium choice featuring an interactive screen available in various sizes.



Every meeting deserves a NovoConnect solution!

CEO office

A NovoTouch flat panel display in the CEO's office lets him freely discuss and share ideas with the team and important clients.

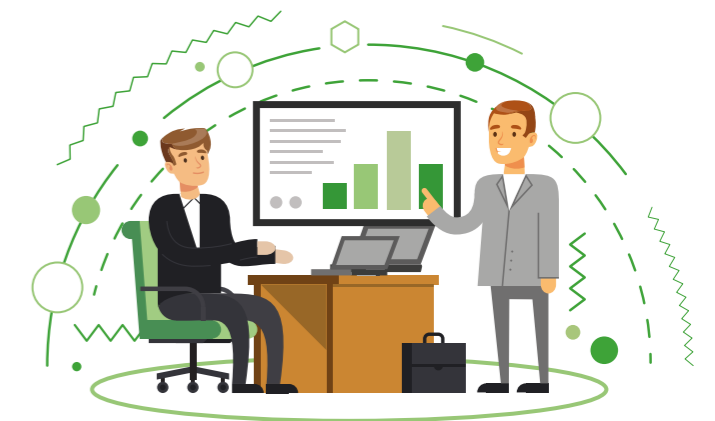

NovoPro

NovoPro is designed to be integrated into the existing network and deployed to multiple rooms.



NovoEnterprise

NovoEnterprise is the ideal companion for a meeting room projector, or screen - ensuring optimal standalone WiFi performance.



Mid-size meetings

In the medium-size meeting room, LauncherPlus enables guests to connect and share with ease, and without additional IT support.



LauncherPlus

The optional LauncherPlus connects to a laptop to establish a direct WiFi connection to any NovoConnect device. This USB dongle greatly simplifies the connection. With zero impact on the existing network, this USB dongle makes WiFi connection to NovoConnect devices easy and secure.



Conference room

The big conference room is where the whole office comes together. With one NovoEnterprise and four LauncherPlus units everyone can connect and collaborate with ease.





	NovoTouch LK6530i	NovoTouch LK7530i	NovoTouch LK8630i	NovoTouch LK9810i
Display Technology	Backlit LED (IPS Panel)	Backlit LED (IPS Panel)	Backlit LED (IPS Panel)	Backlit LED (IPS Panel)
Panel Size; Aspect Ratio	65", 16:9	75", 16:9	86", 16:9	98", 16:9
Brightness	350cd/m ²	330cd/m ²	330cd/m ²	440cd/m ²
Contrast Ratio (Typical)	1,200:1	1,200:1	1,200:1	1,300:1
Native Resolution	4K Ultra-HD (3840 x 2160)			
Viewing Angle (Horiz/Vert)	178°/178°			
Refresh Rate (Hz)	60Hz	60Hz	60Hz	60Hz
Display Color (Bit)	1.06 billion (10-bit)			
Orientation	Landscape			
Touch Technology	Infrared Touch			
Touch Points	10 Writing, 20 Touch	10 Writing, 20 Touch	10 Writing, 20 Touch	5 Writing, 10 Touch
Surface Protection	4mm Thick Toughened Glass (Level 7H on Mohs Scale of Mineral Hardness)			
Minimum Touch Object	Single-Touch ≥Φ6mm and Multi-Touch ≥Φ8mm			
Touch Tools	Finger, Stylus, Glove, Opaque Objects			
Gestures Supported	Yes			
System Version	Android™ v6.0	Android™ v6.0	Android™ v6.0	Android™ v4.2.1
CPU	RK3399, Dual-Core ARM® Cortex® A72 and Quad Core ARM® Cortex® A53			ARM® Cortex® A9 Dual Core CPU
GPU	Mali™ T860	Mali™ T860	Mali™ T860	Quad Core GPU
RAM	4GB DDR3	4GB DDR3	4GB DDR3	1.5G RAM
Internal Storage	16GB	16GB	16GB	8GB
OS Compatibility	Windows® (Windows 7 and above: Driver Free), macOS (10.10 and above), Android™ (2.2/2.3/4.0/4.1/4.2 (Kernel v3.5 and above - Driver Free), Chrome (v39 and above), Linux (Kernal v3.5 and above)			
I/O Ports	HDMI v2 (x1), HDMI v1.4 (x2), DisplayPort (x1), VGA-In (x1), Audio-In (3.5mm) (x1), AV-In (x1), HDMI-Out (1080P) (x1), Audio-Out (3.5mm) (x1), Coaxial-Out (RCA) (x1), LAN (RJ45) (x1), RS232 (x1), USB Type A 2.0 (x4), USB Type A 3.0 (x2), USB Type B (x2)			HDMI v1.4 (x1), HDMI v1.3 (x3), AV-In (x1), VGA-In (x3), Audio-In (x3), VGA-Out (x1), Audio-Out (3.5mm) (x1)), Coaxial-Out (RCA) (x1), LAN (RJ45) (x1), RS232 (x1), USB Type A 2.0 (x4), USB 3.0 (x1), USB Type B (x2)
Internal Speakers	12W (x2) (Stereo)	12W (x2) (Stereo)	12W (x2) (Stereo)	10W (x2) (Stereo)
Power Supply (Internal)	AC 100-240V, 50/60Hz			
Dimensions	1,521 x 915 x 99 mm	1,762 x 1,034 x 101 mm	1,988 x 1,178 x 99.6 mm	2,257 x 1,335 x 121 mm
Weight (Net)	46 kg	62 kg	78 kg	150 kg
Weight (Gross)	57 kg	78 kg	105 kg	200 kg
Accessories (Standard)	AC Power Cord, VGA Cable, USB Cable, Audio Cable, Stylus (x3), Remote Control, Wall Mount Kit, Documentation Kit			



	NovoPro	NovoEnterprise
Model	NP2000	NE3000EU
Support Operating System	Windows 7 / 8 / 10 (32 bits and 64 bits), macOS 10.7 and above, iOS 7.0 and above, Android 4.0 and above, Chromebook 37+	
Desktop Streaming	up to 1080p, 60 fps	
Screen Mirroring	Google cast for Android, AirPlay for iOS	
WiFi	802.11ac, b/g/n 2.4GHz & 5GHz, 2T2R	802.11ac, b/g/n, 2.4GHz & 5GHz, 2T2R with external antenna
Output Resolution	HD1080p (1920 x 1080), WXGA (1280 x 800), HD720p (1280 x 720), XGA (1024 x 768)	
Output	HDMI-Out	HDMI-Out; Audio-Out 3.5mm mini jack
Input	Ethernet RJ45; USB Type A; MicroSD Slot; MicroUSB Power-In	Ethernet RJ45 (PoE); USB Type A x 2; MicroSD Slot; HDMI-In; Audio-In 3.5mm mini jack; DC Jack Power-In
Security	Dual Network, AES-256 encryption, Kensington lock	
Dimensions (L x W x H)	120 x 75 x 16 mm	165 x 123 x 21 mm
Weight	128 g	250 g
Power	Input to AC adaptor: AC 100-240V, 50/60Hz. Output from AC adaptor: 5V/2A, Consumption: 10W.	

	Launcher Plus
Model	QL300
Support Operating System	Windows 7 / 8 / 10 (32 bits and 64 bits), macOS 10.7 and above
WiFi	embedded WiFi
Dimensions (L x W x H)	70 x 70 x 14 mm
Weight	60 g





CONTACT US

Vivitek EMEA Headquarters
Zandsteen 15
2132 MZ Hoofddorp
The Netherlands
Tel: +31 20-8003960
www.vivitek.eu

www.novoconnect.eu

A brand of  DELTA